


Hinged Non Welded Positive Bow Centralizer

Non welded positive Centralizers are uniquely designed with flat bottom U profile of different depths. The Centralizers significantly reduce frictional drag while being used in deviated holes. They provide almost 100% Stand Off when run inside a cased hole. They are supplied 1/4" or 6 mm less than the inside diameter of the hole size in which Centralizer is to be run. This design eliminates weak (brittle) spots passage. The flat U profile is fitted in self-locking retaining lips for firm and positive hold.

Features

- Special Iron Phosphate coating process to prevent from Rust and insures stocking in the open for a long time.
- These are shipped in half assembled condition for economical in freight and storage costs
- Supplied with stop collar and hinge pin

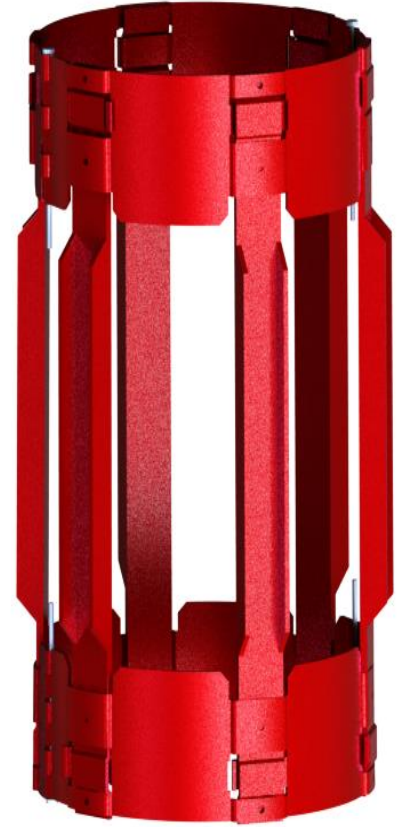

Available in 4 1/2" to 30" sizes. Any special sizes or combination can be made available on request.